



CHIEF MT-2212-S

CHIEF Products help people realize -
How Easy it is to Handling Refrigerant Systems
(R-22 · R-134a)

FEATURES :

- ◆ Economic & Portable.
- ◆ Refrigerant Recovery for 5USRT~200USRT Chiller and Refrigerator.
- ◆ For TON-Tank Residual Refrigerant Recovery at Refrigerant Station.
- ◆ For A/C Repaired Shop in Refrigerant Handling Process.

(※1USRT=3024 Kcal/H, 12000 BTU/H)

SPECIFICATIONS

(Air-cooling Type)

Model No.	MT-2212-S
Dimensions	842 ^L ×442 ^W ×680 ^H mm
Weight	86.5 KG
Compressor Input Power	1.86 KW (2.5 HP)
Vapor Recovery Rate	0.5~1.0 Kg/M
Liquid Recycling Rate	1.2~2.0 Kg/M
Starting Control	With Automatic Equalizer
Purge Design	Auto & Manual
Filter	Inlet & Outlet
Oil Drain	Auto & Manual

Recovery Rate: Base on suction pressure above 20 psig.

MT-2212-S machine is designed to Recovery/Recycling refrigerant and Liquid Refrigerant flushing process for refrigeration systems.



Voltage	1Ø220V, 60/50HZ.
Purge Tank	SUS-304 material.
Accumulator	SUS-304 material, with perfect process Heat-Exchanger design.
Safety Equipment	Low/High pressure control.
	Leakage No-Fuse-Breaker control.
	Safety Ruptures plug.
	Liquid-Back control
	Electric Over-Load protection.




CHIEF[®] Recovery/Recycling unit will be fit for Vapor/Liquid recovery , liquid refrigerant recycling and flushing purpose in industry refrigerator system.

CHIEF[®] unit accomplishes this by withdrawing liquid mixed with oil and particles from the evaporator, condenser, accumulator and then distillation/compressing/condensing refrigerant, and discharging into the pure storage tank.

DON'T WORRIES ABOUT THE COMPRESSOR WOULD BE DAMAGED DURING OPERATING LIQUID REFRIGERANT RECOVERY.



Refrigerant Recovery/recycling process at chiller room in Taiwan.

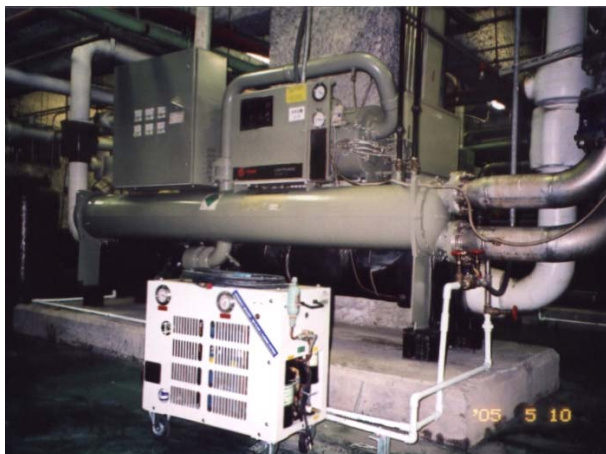

Refrigerant recovery and Recycling process at Metro Station.